




PcP. Stair treads type O5 V Achil[®] and O5-M



- Based on PcP. type O5[™] punch pattern
- Offered in accordance with design loads of BS 6399 Part 1: 1996, BS EN 14122-3 or BS 4592 - 3 subject to type and design requirements
- Maximum 5 mm diameter holes. Ideal for pedestrian access in stiletto heels
- Can be supplied in accordance with "Part M"
- With or without rear riser
- Optional powder coated visual nose
- Standard range to 1800 mm span
- Bespoke designs as required
- Alternative designs using close mesh rib gratings, alternative planks and O5[™] visual nosing
- Removable nose option available (O5[™] -M"R")

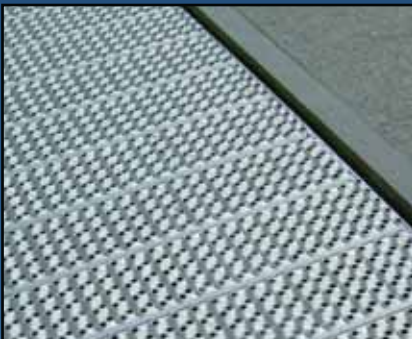

One step ahead...




PcP. Gratings Ltd.
Enterprise Drive . Four Ashes
Wolverhampton WV10 7DF
Tel: 01902 791792 . Fax: 01902 791795
Email: sales@pcpgratings.co.uk www.pcpgratings.co.uk

Member of



PcP. Stair treads type O5 V Achil[®] and O5-M

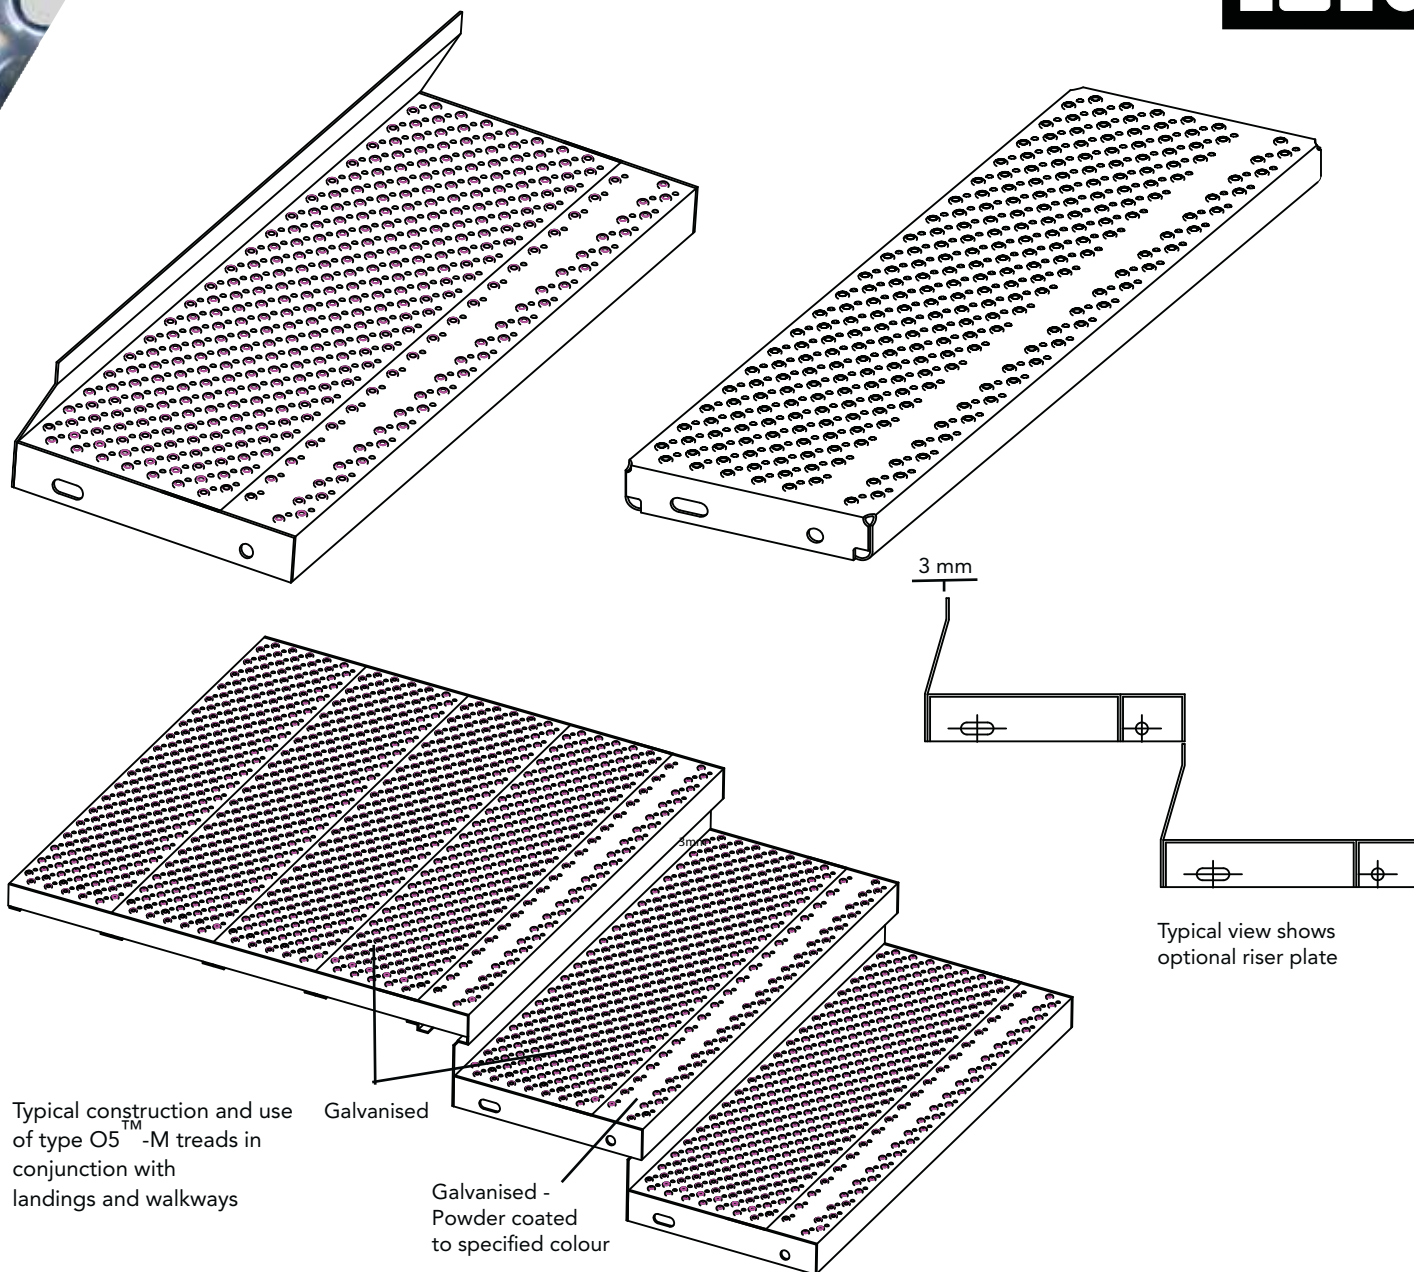

Typical construction and use of type O5[™]-M treads in conjunction with landings and walkways

Galvanised

Galvanised - Powder coated to specified colour

Typical view shows optional riser plate

PcP. stair tread type O5[™] V Achil and O5[™]-M are based on the PcP. type O5 pattern. Type O5 is identified by 5 mm dia. punched grip and drainage holes and low visual transparency. This pattern is used commonly in high working areas to stop falling objects or in public areas requiring heel-proof flooring.

- Thickness: 2 mm thick material
- Material: Steel
- Surface treatment: Self coloured or Hot dip galvanised

For further information, please contact our sales department.



PcP. Gratings Ltd.

Enterprise Drive . Four Ashes

Wolverhampton WV10 7DF

Tel: 01902 791792 . Fax: 01902 791795

Email: sales@pcpgratings.co.uk www.pcpgratings.co.uk

Member of

